

DW60 Wheel Dumpers



Heavy duty design offers maximum payload and safe operation

The DW60 combines the power of a hydrostatic transmission Tier 4 Final Perkins engine with an industry leading, heavy duty design. With massive, impact-resistant box sections, this power swivel dumper offers high performance and a bucket engineered for durability. The DW60 is well balanced and easily moves its rated payload across the varying terrains of a job site. Full-time four-wheel drive ensures optimum maneuverability in difficult conditions.

- Operator station is easily accessible from both sides for added convenience. Dash board displays a full range of dials/indicators lights such as fuel gauge, low fuel warning light and parking brake light.
- Hydrostatic drive is easy and intuitive for the operator. The four-wheel drive provides perfect traction in difficult terrain, and articulated steering allows for a tight turning radius
- Swivel bucket allows material to be unloaded on either side of the unit for added versatility
- A top speed of 16mph/25kmh provides for fast cycle times and efficiency
- Awning and cab options available




Technical specifications

| Operating d | lata |
|-------------|------|
|-------------|------|

| Payload | 13,228 lb |
|---------------------------------|-------------------------------------|
| Shipping weight ROPS | 10,886 lb |
| Shipping weight cabin | 11,122 lb |
| Operating weight ROPS | 10,728 lb |
| Skip capacity - Leveled | 3.07 yd ³ |
| Skip capacity - Heaped | 4.19 yd ³ |
| Skip capacity - Water | 2.17 yd ³ |
| Engine / Motor | |
| Engine / Motor manufacturer | Perkins |
| Engine / Motor type | 854F |
| Engine / Motor | Watercooled 4-cylinder turbo diesel |
| Engine performance - ISO 3046/1 | 73.8 hp |
| Displacement | 207.4 in ³ |
| Engine RPM | 2500 rpm |
| Emissions | T4f |
| Traction drive | 4WD, Hydrostatic |
| Travel speed | 15.5 mph |
| Articulation angle | 29° |
| Pendulum angle | 11 ° |
| Turning radius | 236.2 in |
| Gradeability | 50 % |
| Tires | 405/70-20 14PR |
| L x W x H ROPS | 194.3 x 87.8 x 122.4 in |
| Steering pump | Axial piston pump |
| Flow rate | 40.2 US gpm |
| Operating pressure | 6,527 psi |
| Duty pump | Gear pump |
| Flow rate | 18 US gpm |
| Operating pressure | 3,481 psi |
| Fuel tank capacity | 21.9 US gal |
| Hydraulic oil tank | 14.5 US gal |
| Sound level (LwA) | 101 dB(A) |
| | |



Dimensions

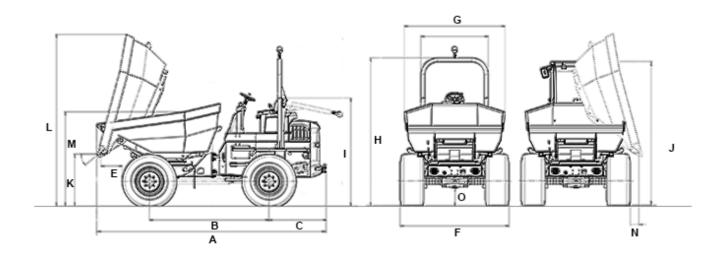

| А | Overall length | 194.3 in |
|---|------------------------|----------|
| В | Wheelbase | 97.8 in |
| С | Rear overhang | 46.9 in |
| E | Dumping distance | 19.9 in |
| F | Width | 87.8 in |
| G | Skip width swivel skip | 82.3 in |
| Н | Height total (ROPS) | 122.4 in |
| I | Height tilted ROPS | 86.1 in |
| J | Height cabin | 117.8 in |
| K | Dump height max. | 46.2 in |
| | | |



| L | Skip height tilted | 138.7 in |
|---|--------------------|----------|
| М | Skip height | 75 in |
| N | Dumping distance | 4 in |
| 0 | Ground clearance | 14.5 in |
| | Dump angle | 48 ° |

Please note

that product availability can vary from country to country. It is possible that information / products may not be available in your country. More detailed information on engine power can be found in the operator's manual; the stated power may vary due to specific operating conditions. Subject to alterations and errors excepted. Applicable also to illustrations.

Copyright © 2017 Wacker Neuson SE.